

Rechargeable Sealed Lead-Acid Battery

PS-665

6 Volt 6.5 Amp. Hrs.



Features:


- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS

Nominal Voltage	6 volts (3 cells in series)
Nominal Capacity	
20 hour rate (325mA to 5.25 volts)	6.50 A.H.
10 hour rate (0.61A to 5.25 volts)	6.10 A.H.
5 hour rate (1.10A to 5.10 volts)	5.50 A.H.
1 hour rate (4.03A to 4.50 volts)	4.03 A.H.
15 min rate (12.7A to 4.50 volts)	3.18 A.H.
Approximate Weight	2.1 pounds (0.95 kg)
Energy Density (20 hour rate)	1.13 Watt-hours/cubic inch (69.0 Watt-hours/l)
Specific Energy (20 hour rate)	18.6 Watt-hours/pound (41.0 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	20 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.)	19.5 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.)	65.0 amperes
Terminals	Positive: "F2": Quick disconnect tabs, 0.250" x 0.032"- Mate with AMP. INC. FASTON "250" series Negative: "F1": Quick disconnect tabs, 0.187" x 0.032"- Mate with AMP. INC. FASTON "187" series
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case	ABS Plastic


Shelf Life and Storage

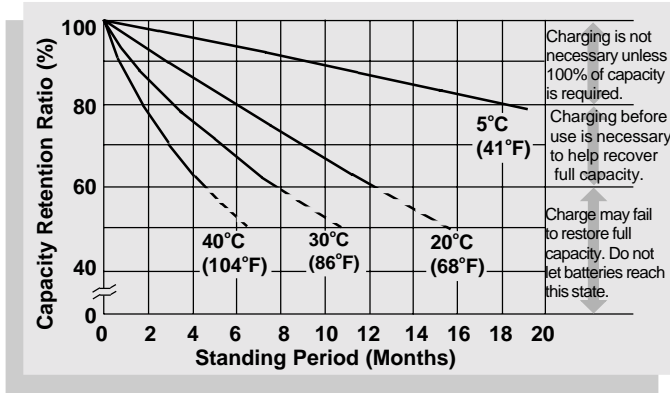


Discharge Characteristics

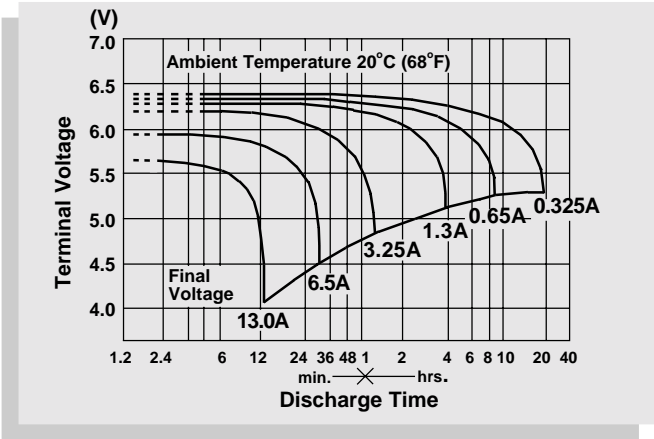


Life Characteristics in Stand-By Use

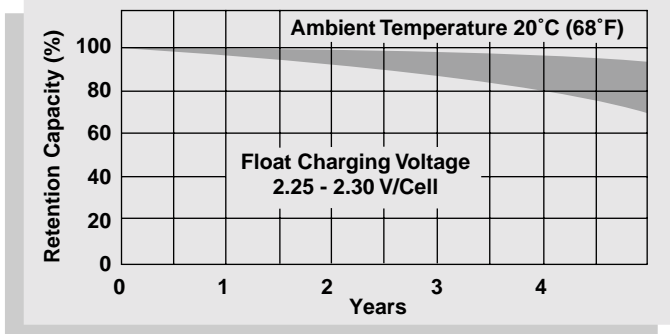

Discharge Time vs. Discharge Current

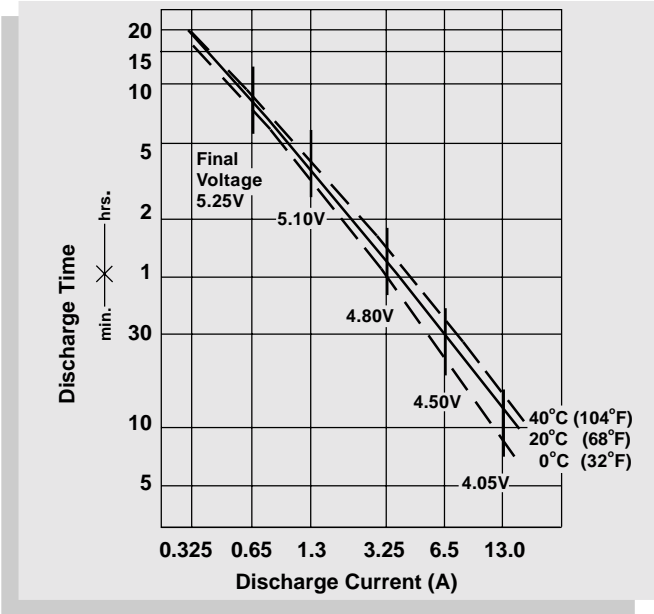


Life Characteristics in Cyclic Use

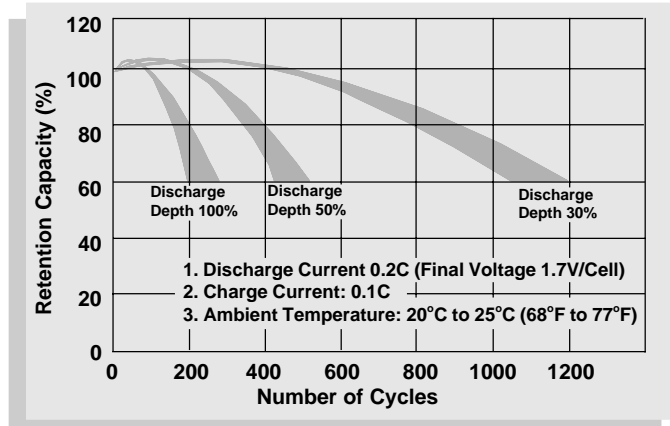

Physical Dimensions: in. (mm)

Terminals:
F2 (mm) F1 (mm)

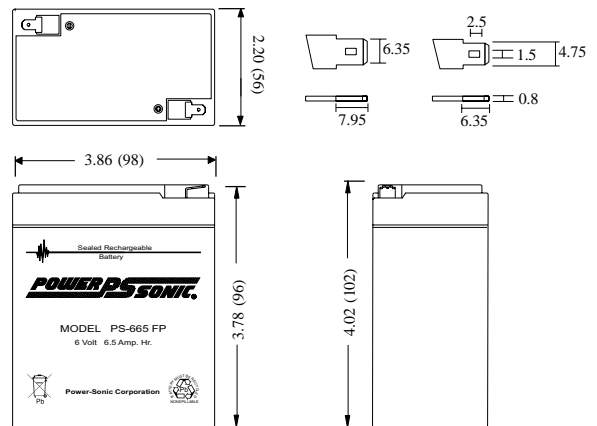

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.
All data subject to change without notice.

CHARGING

Cycle Applications: Limit initial current to 1.8A. Charge until battery voltage (under charge) reaches 7.20 to 7.35 volts at 68°F (20°C). Hold at 7.20 to 7.35 volts until current drops to approximately 65 mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 6.75 to 6.90 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.



DISTRIBUTED BY:
COAST ENERGY CORPORATION, INC.
1924 First St. San Fernando, CA 91340
Tel: 818-361-6461 Fax: 818-898-3219

customerservice@wilpowerbattery.com



ISO9001-2000
FM39170

www.wilpowerbattery.com